
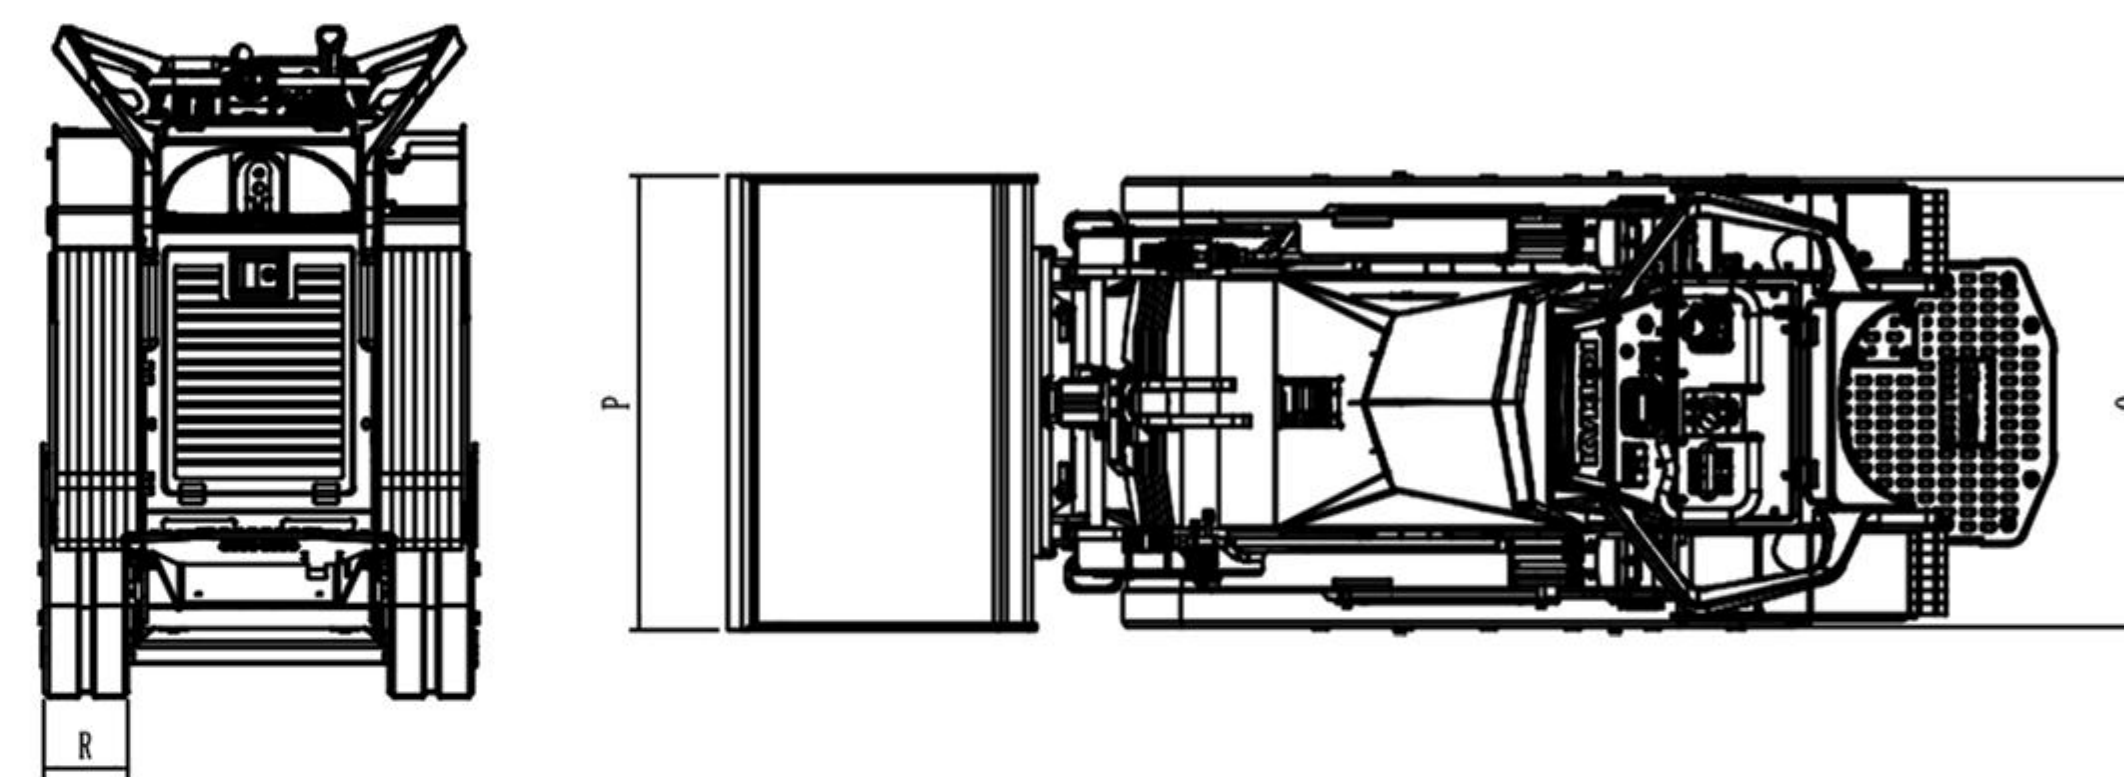


## MINI SKID STEER

| DIMENSIONS(STD)                           |        |
|-------------------------------------------|--------|
| Operating weight                          | 1560kg |
| Rated capacity                            | 462kg  |
| A Operating height, max std.bucket        | 2942mm |
| B Hinge pin height,max                    | 2162mm |
| C Overall machine height                  | 1436mm |
| D Overall length of machine,std. bucket   | 2830mm |
| E Overall length of machine,no attachment | 2186mm |
| F Wheelbase                               | 1168mm |
| G Unloading height, Max                   | 1750mm |
| H Unloading distance                      | 543mm  |
| I Minimum ground clearance                | 123mm  |
| J Departure angle                         | 27.5°  |
| K Approaching angle                       | 29°    |
| O Track peripheral width                  | 685mm  |
| M Unloading angle                         | 26.5°  |
| S Maximum horizontal pushing depth        | 22.6mm |
| P Width                                   | 932mm  |
| Q Maximum width of track                  | 920mm  |
| R Track width                             | 180mm  |

| POWER                |                      |
|----------------------|----------------------|
| Model No.            | KUBOTA D1105-EF09    |
| Fuel                 | Diesel               |
| Rated power          | 14kw                 |
| Emissions compliance | EPATier 4/EU Stage V |
| Number of cylinders  | 3                    |
| Displacement         | 1.123L               |
| Rated speed          | 2550rpm              |

| OPERATION                      |         |
|--------------------------------|---------|
| Ground drive speed             |         |
| Forward/reverse                | 6.3km/h |
| Ground pressure (ISO/CD 16754) |         |
| (180-mm) Tracks                | 0.33bar |
| Gradeability                   | 35%     |

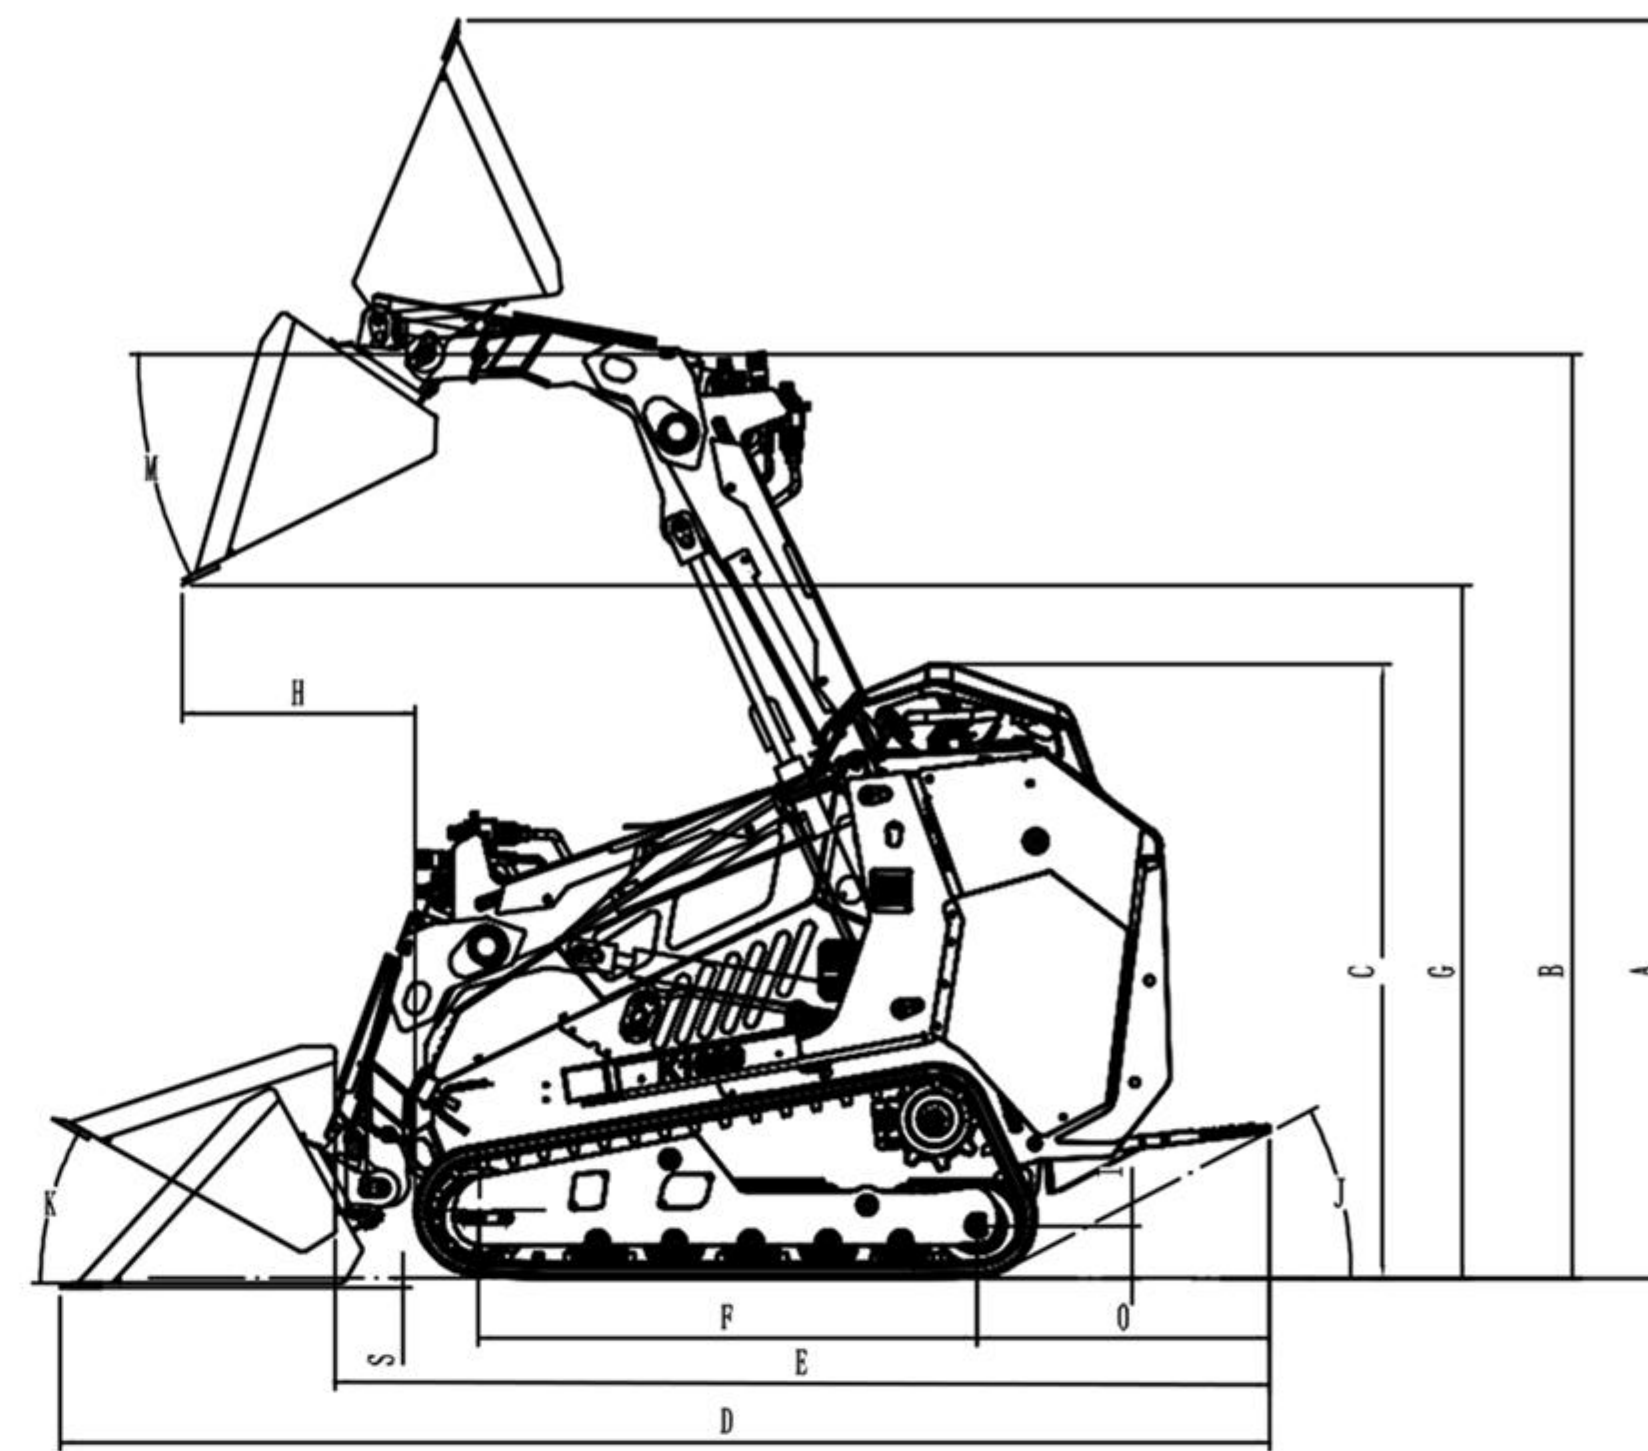

| HYDRAULIC SYSTEM  |                     |
|-------------------|---------------------|
| Auxiliary circuit |                     |
| Ram pump          |                     |
| Flow rate         | 47.5L/min+47.5L/min |
| Pressure          | 210bar              |
| Gear pump         |                     |
| Flow rate         | 30L/min             |
| Pressure          | 220bar              |

| FLUID CAPACITIES             |         |
|------------------------------|---------|
| Fuel tank capacity           | 10.5gal |
| Lubricating oil capacity     | 1.3gal  |
| Hydraulic reservoir capacity | 9.5gal  |

| BATTERY                     |         |
|-----------------------------|---------|
| SAE reserve capacity rating | 110min  |
| SAE cold crank@ 0°F(-18℃)   | 800amps |
| Electrical system           | 12V     |



- VALAVE:TAIFENG
- PUMP:TAIFENG+WANYE
- TRAVELING MOTOR:YINGPU
- CYLINDER:STRONGER



# RH1000

## MINI SKID STEER