


MINI SKID STEER

DIMENSIONS(STD)	
Operating weight	1190kg
Rated capacity	0.09 m³
A Operating height, max std.bucket	2744mm
B Hinge pin height,max	2042mm
C Overall machine height	1421mm
D Overall length of machine,std. bucket	2537mm
E Overall length of machine,no attachment	1993mm
F Wheelbase	985mm
G Unloading height, Max	1541mm
H Unloading distance	500mm
I Minimum ground clearance	140mm
J Departure angle	26°
K Approaching angle	29°
O Track peripheral width	614mm
M Unloading angle	25°
S Maximum horizontal pushing depth	126mm
P Width	870mm
Q Maximum width of track	906mm
R Track width	180mm

POWER	
Model No.	Loncin LC2V80
Fuel	Petrol
Rated power	18kw
Emissions compliance	EPATier 4/EU Stage V
Number of cylinders	2
Displacement	0.898L
Bore	72mm
Stroke	73.6mm
Rated speed	3000rpm

OPERATION	
Ground drive speed	
Forward/reverse	6km/h
Ground pressure (ISO/CD 16754)	
(180-mm) Tracks	0.3bar
Gradeability	25%

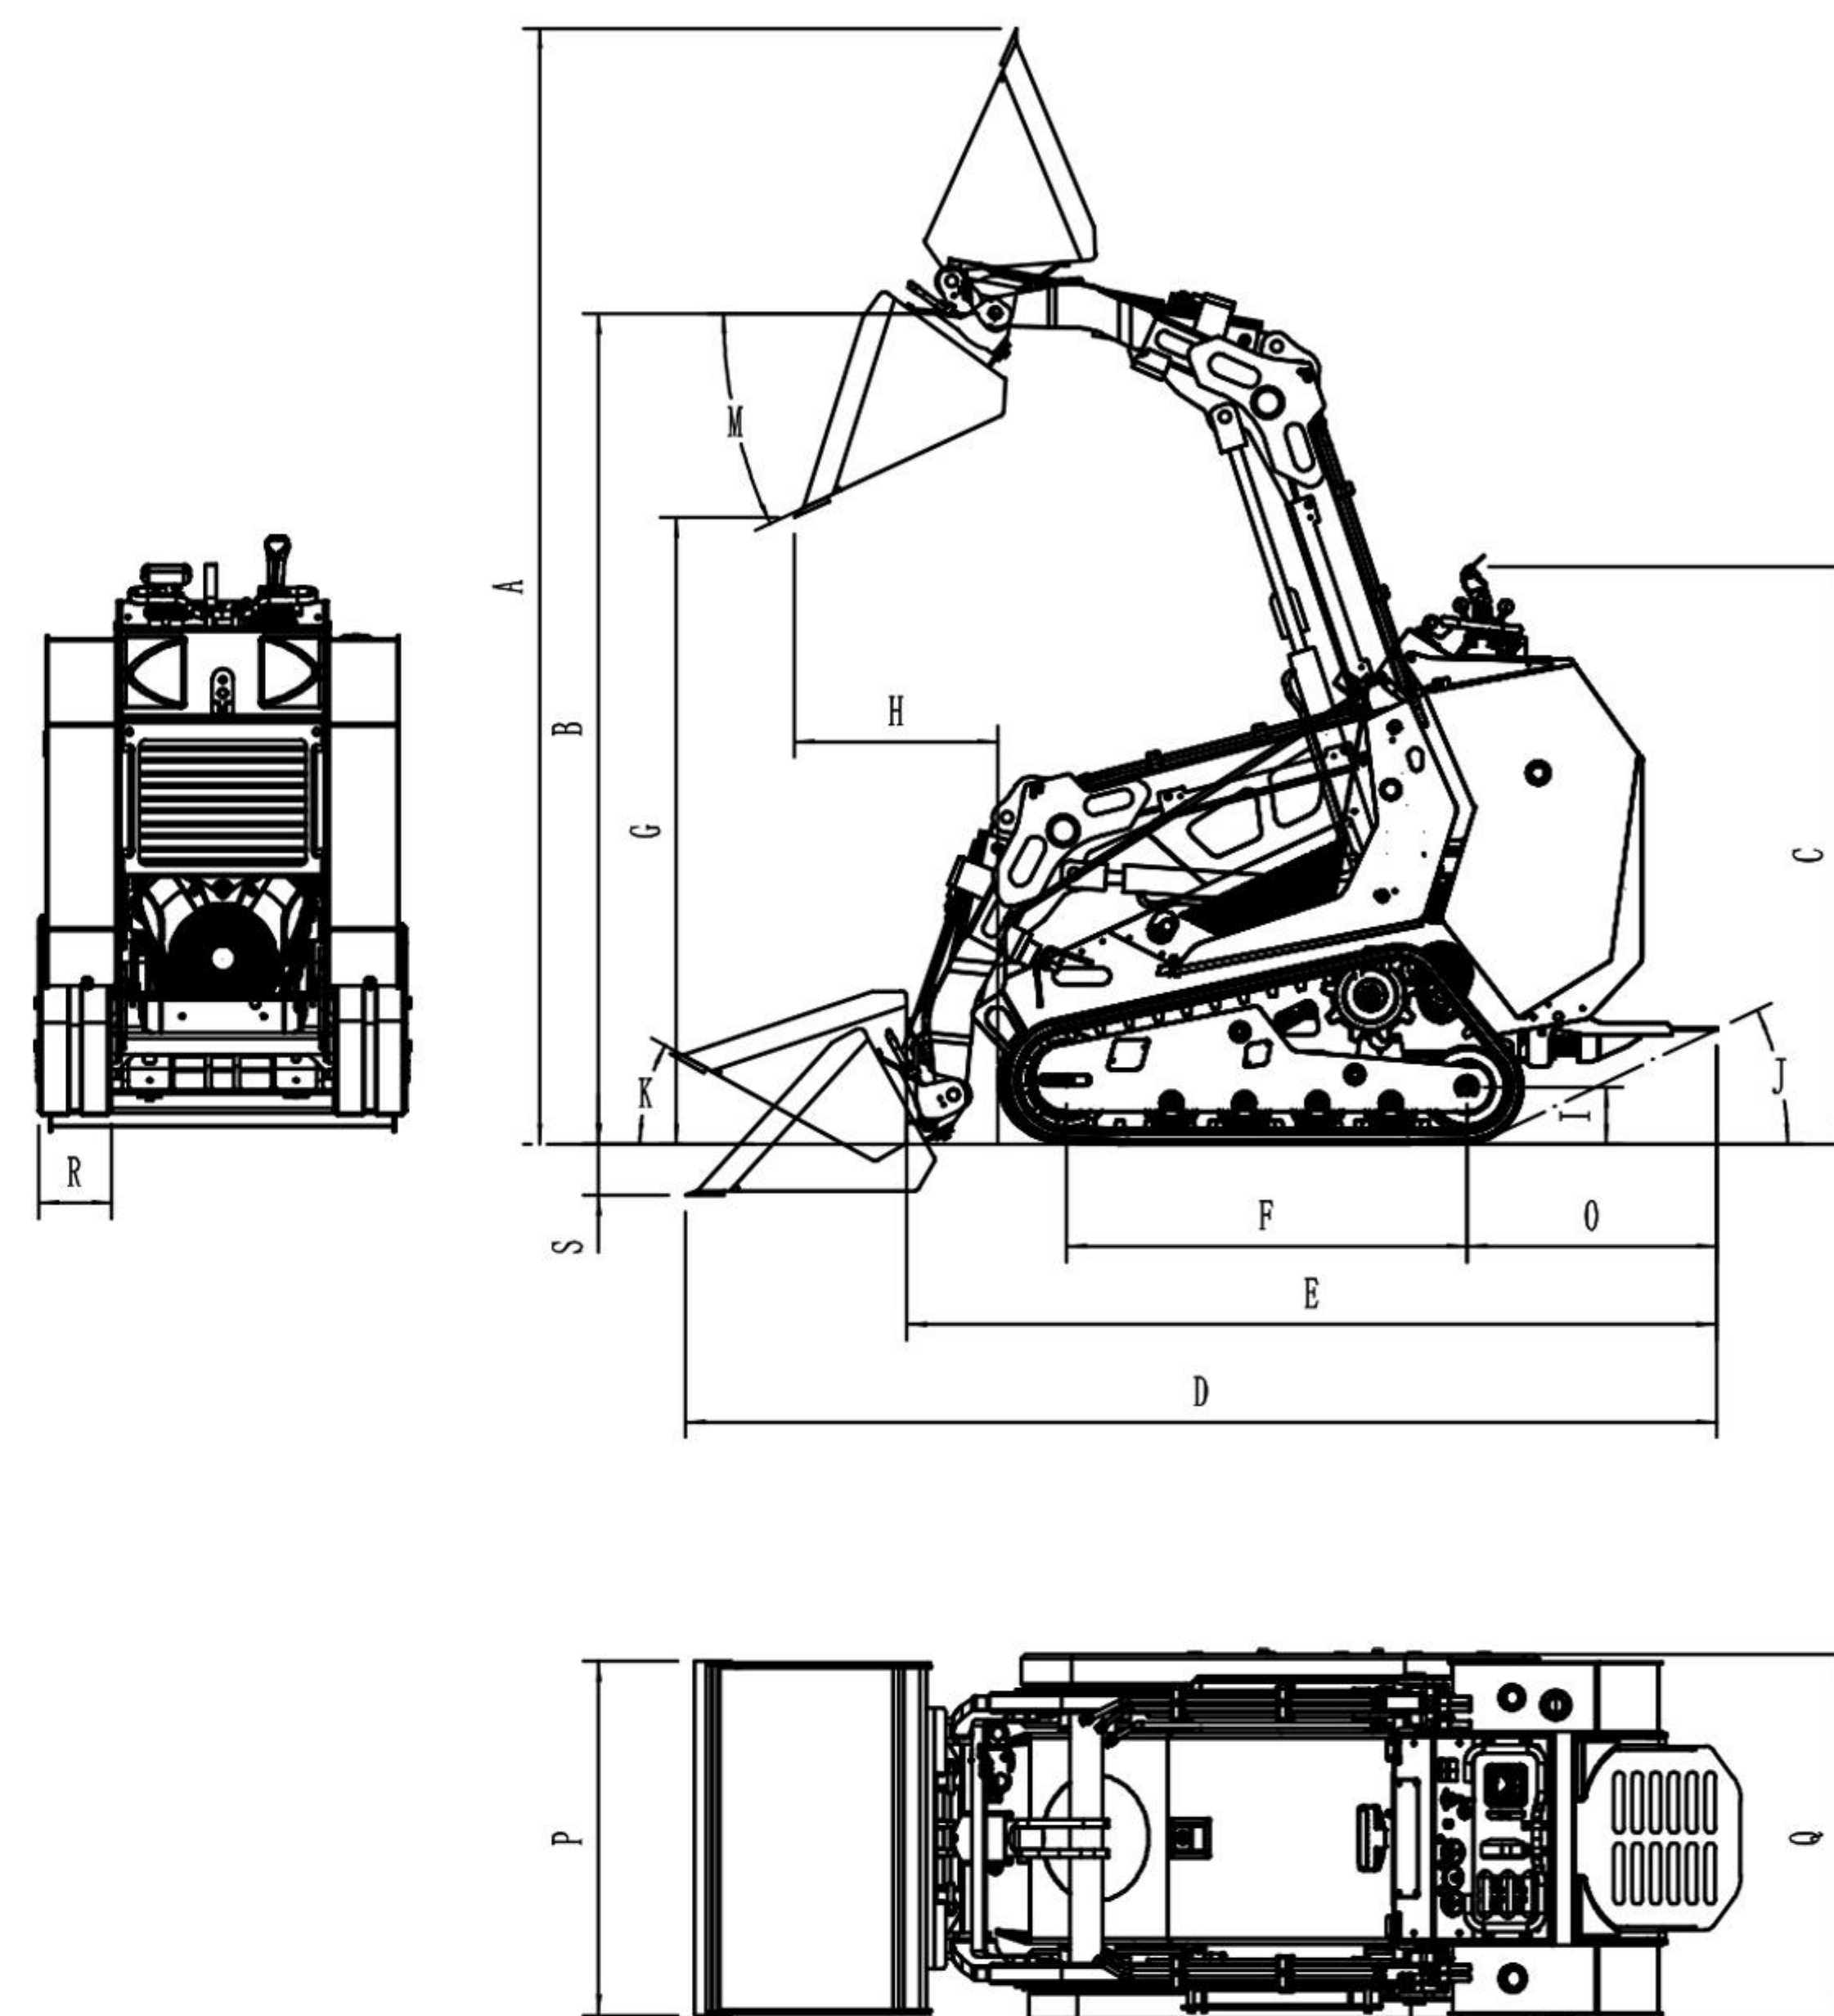

HYDRAULIC SYSTEM	
Auxiliary circuit	
Ram pump	
Flow rate	64.4L/min
Pressure	220bar

FLUID CAPACITIES	
Fuel tank capacity	12.5gal
Lubricating oil capacity	1.3gal
Hydraulic reservoir capacity	12.5gal

BATTERY	
SAE reserve capacity rating	110min
SAE cold crank@ 0°F(-18℃)	800amps
Electrical system	12V



- VALAVE:TAIFENG
- PUMP:TAIFENG
- TRAVELING MOTOR:HENGLI
- CYLINDER:STRONGER

